

ATTORNEY'S DOCKET NO.
036560.6630
(1031-00)

PATENT APPLICATION

1

APPLICATION FOR U.S. PATENT UNDER 37 C.F.R. § 1.53(b)
TRANSMITTAL FORM

Box Patent Application
ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

JC678 U.S. PTO
09/472534
12/27/99

Sir:

Transmitted herewith for filing is the patent application
of:

Inventor or Application Identifier:
Anthony (nmi) Mazzurco, et al.

Entitled: METHOD AND APPARATUS FOR PROVIDING NETWORK
PROTECTION AT INPUT/OUTPUT INTERFACES OF A CROSS-
CONNECT SWITCH

Enclosed are:

☒ Specification (14 Total Pages)
☒ Drawing(s) (4 Total Sheet(s) of ☒ Formal ☐ Informal)
☒ Combined Declaration and Power of Attorney (5 Total Pages)
☒ Newly executed (original or copy) (UNSIGNED)
☐ Copy from a prior application
(for continuation/divisional only)

☐ An Assignment of the invention to _____ is attached.
A separate cover sheet in compliance with 37 C.F.R. § 3.28
and § 3.31 is included with an Assignment recordal fee of
\$40.00 pursuant to 37 C.F.R. § 1.21(h).

☐ Information Disclosure Statement (IDS) PTO-1449
☐ Copies of IDS Citations.

☐ Preliminary Amendment

☒ Certificate of Mailing

☒ Return Receipt Postcard

☐ Other _____

ATTORNEY'S DOCKET NO.
036560.6630
(1031-00)

PATENT APPLICATION

2

Applicant is:

☒ Large Entity

☐ Small Entity

☐ Small Entity Statement enclosed

☐ Small Entity Statement filed in prior application.

Status still proper and desired.

The accompanying application is:

☒ Original

☐ Continuation ☐ Divisional ☐ Continuation-In-Part (CIP)
of prior application No. _____ which is hereby
incorporated by reference therein.

FEE CALCULATION					FEE
	Number		Number Extra	Rate	Basic Fee
					\$ 760.00
Total Claims:	15	- 20 =	0	X \$18 =	\$ -0-
Independent Claims	2	- 3 =	0	X \$78 =	\$ -0-
TOTAL FILING FEE =					\$ 760.00

X Enclosed is a check in the amount of \$760.00 to satisfy filing fee requirements under 37 C.F.R. § 1.16. Please charge any additional fees or credit any overpayment to Deposit Account No. 02-0384 of BAKER & BOTTS, L.L.P. A duplicate copy of this sheet is enclosed.

Respectfully submitted,
BAKER & BOTTS, L.L.P.
Attorneys for Applicant



Charles S. Fish
Reg. No. 35,870
December 27, 1999

Correspondence Address:
V. Lawrence Sewell, Esq.
Alcatel USA, Inc.
1000 Coit Road, M/S LEGL 3
Plano, Texas 75075
(972) 519-3735

Attorney's Docket:
036560.6630
(1031-00)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Anthony (nmi) Mazzurco, et al.
Date Filed: December 27, 1999
Title: METHOD AND APPARATUS FOR
PROVIDING NETWORK PROTECTION AT
INPUT/OUTPUT INTERFACES OF A
CROSS-CONNECT SWITCH

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231
Dear Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

I hereby certify that the attached Patent Application, Declaration and Power of Attorney (unsigned), Drawings, and check in the amount of \$760.00 are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on this 27th day of December, 1999, addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.



Willie Jiles

Express Mail Receipt
No. EM082814066US

PATENT APPLICATION

ON

METHOD AND APPARATUS FOR PROVIDING NETWORK PROTECTION AT
INPUT/OUTPUT INTERFACES OF A CROSS-CONNECT SWITCH

BY

Mazzurco, Anthony (nmi)
Crossett, III, Joseph A.
Darabpour, Manouchehr (nmi)

1031-00
JWM/CSF

METHOD AND APPARATUS FOR PROVIDING NETWORK PROTECTION AT
INPUT/OUTPUT INTERFACES OF A CROSS-CONNECT SWITCH

TECHNICAL FIELD OF THE INVENTION

The present invention is related in general to telecommunications signal transport and more particularly to a method and apparatus for providing network protection at input/output interfaces of a cross-connect switch.

5

BACKGROUND OF THE INVENTION

When network protection is implemented in a cross-connect switch, there are stringent requirements concerning the amount of time needed to perform the protection switch once a problem has been detected. Typically, the protection switch is performed by cutting another connection through the matrix of the cross-connect switch. However, cutting another connection through the matrix has various disadvantages. Cross-connection algorithms generally take more time to complete than is allowed by the protection switching requirements. For example, the protection switching requirements specify tens of milliseconds rather than the hundreds of milliseconds it takes to cut a new connection. Creating and deleting cross-connections may not meet the desired switching times. If center stage rearrangements are required in a standard three stage non-blocking matrix, then the time needed to adjust matrix connections for a protection switch may take even longer. Therefore, it is desirable to avoid the slower than required changes in matrix connections to perform a protection switch in a cross-connect switch.

SUMMARY OF THE INVENTION

From the foregoing, it may be appreciated by those skilled in the art that a need has arisen for a technique to perform protection switching that does not require changing connections in the matrix of a cross-connect switch. In accordance with the present invention, a method and apparatus for providing network protection at input/output interfaces of a cross-connect switch are provided that substantially eliminate or reduce disadvantages and problems associated with conventional protection switching techniques.

According to an embodiment of the present invention, there is provided a method for providing network protection at input/output interfaces of a cross-connect switch that includes receiving an inbound working channel and an inbound protection channel at an input interface. A signal quality of the inbound working and protection channels is determined. One of the inbound working and protection channels is selected in response to the signal quality of the inbound working and protection channels. The selected one of the inbound working and protection channels is provided to a switching matrix. Thus, protection switching is performed at the interfaces to the cross-connect switch and not in the switching matrix. Pre-determined connections in the switching matrix may be maintained regardless of which one of the inbound working and protection channels are selected to be provided to the switching matrix.

The present invention provides various technical advantages over conventional protection switch techniques. For example, one technical advantage is to avoid adjusting connections in a matrix of a cross-connect switch to effect a protection switch. Another technical advantage is to provide a capability to effect protection switches in a

cross-connect switch at its input/output interfaces rather than its matrix. Yet another technical advantage is to provide a simpler protection switch technique for any protection scheme implementation. Other technical advantages may be readily apparent to those skilled in the art from the following figures, description, and claims.

5

036560.6630 (1031-00)

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention and the advantages thereof, reference is now made to the following description taken in conjunction with the accompanying drawings, wherein like reference numerals represent like parts, in which:

FIGURE 1 illustrates a protection switch for a 1+1 linear automatic protection switching protection scheme;

FIGURE 2 illustrates a protection switch for a 1:n linear automatic protection switching protection scheme;

FIGURES 3A and 3B illustrate a protection span switch for a bidirectional line switched ring protection scheme;

FIGURES 4A and 4B illustrate a protection ring switch for a bidirectional line switched ring protection scheme;

FIGURE 5 illustrates a protection switch for a fast facility protection scheme.

DETAILED DESCRIPTION OF THE INVENTION

FIGURE 1 shows a portion of two cross-connect switches in a telecommunications system 10. FIGURE 1 illustrates an example of a 1+1 linear automatic protection switching protection scheme. Telecommunications system 10 includes a first cross-connect switch 12 at a node A and a second cross-connect switch 14 at a node B. First cross-connect switch 12 includes a switching matrix 16, an output interface 18, and an input interface (not shown). Second cross-connect switch 14 includes an input interface 20, a switching matrix 22, and an output interface (not shown). The input interface for first cross-connect switch 12 may be similar to input interface 20 of second cross-connect switch 14. Also, the output interface of second cross-connect switch 14 may be similar to output interface 18 of first cross-connect matrix 12. Information is carried between nodes A and B over one or both of a working channel 24 and a protection channel 26.

In operation, information is transferred over a matrix connection in switching matrix 16 to output interface 18. Switching matrix 16 may implement any type of switching scheme including a three stage non-blocking switching technique. Output interface 18 receives the information from switching matrix 16 at a bridge selector 28. Bridge selector 28 places the information onto both working channel 24 and protection channel 26. Second cross-connect switch 14 receives working channel 24 and protection channel 26 at input interface 20. Input interface 20 includes a selector 30 that determines a signal quality of both working channel 24 and protection channel 26. Based on the signal qualities, selector 30 selects one of working channel 24 and protection channel 26. The selected one of working channel 24 and protection channel 26 is provided to switching matrix 22. Switching matrix 22 can maintain its

pre-determined matrix connections regardless of which one of working channel 24 and protection channel 26 is selected. Thus, time consuming creation and deletion of matrix connections to accommodate a protection switch is avoided.

FIGURE 2 shows an example of a linear 1:n automatic protection switching protection scheme. In this example, n is 2 but may include any integer number. Switching matrix 16 of node A provides two information lines 32 to output interface 18. Selector 28 receives the two information lines and broadcasts the information over protection channel 26 and a plurality of working channels 24a and 24b in order to transfer the information. Selector 28 may also broadcast the information over protection channel 26 upon detecting a failure in any of working channels 24. At input interface 20 of node B, selector 30 receives protection channel 26 and the plurality of working channels 24a and 24b. Selector 30 determines a signal quality of each of the plurality of working channels 24a and 24b. If a working channel fails, selector 30 signals selector 28 to place the failed channel on protection channel 26. Selector 30 selects the data of the failed channel from protection channel 26 and the plurality of the unfailed working channels, either 24a or 24b, onto information lines 34 for transport to switching matrix 22.

FIGURES 3A and 3B show an example of a bidirectional line switched ring protection scheme. FIGURE 3A shows a normal operation of the bidirectional line switched ring protection scheme where selector 28 provides information received from switching matrix 16 to working channel 24 and selector 30 switches the information on working channel 24 for transfer to switching matrix 22. Selector 30 checks the signal quality of working channel 24 and protection channel 26. FIGURE 3B shows operation during a span

switch. For a span switch, selector 28 places information from switching matrix 16 onto protection channel 26 in response to a request from selector 30. Selector 30 provides information from protection channel 26 to switching matrix 22. A span switch may occur whenever working channel 24 has poor or no signal quality.

FIGURES 4A and 4B show a ring switch in a bidirectional line switched ring protection scheme. FIGURE 4A shows a normal operation where selector 28 provides information to working channel 24 and protection channel 26 inbound to input interface 20 at node B. Input interface 20 also provides an outbound working channel 25 and an outbound protection channel 27. FIGURE 4B shows the events involved in a ring switch. Upon detection of a failure in the channels between node B and another node, selector 30 routes information on inbound working channel 24 to outbound protection channel 27. Selector 30 also routes information on inbound protection channel 26 to outbound working channel 25. The routing performed by selector 30 effects the ring switch without disrupting matrix connections within either switching matrix 22 or switching matrix 16.

FIGURE 5 shows a fast facility protection (FFP) scheme. The FFP scheme may occur within cross-connect switch 14. Cross-connect switch 14 receives working channel 24 and protection channel 26 at input interface 20. Selector 30a provides working channel 24 to switching matrix 22 and selector 30b provides protection channel 26 to switching matrix 22. Switching matrix 22 provides working channel 24 and protection channel 26 to an output interface 35. Output interface 35 includes a selector 37 that receives working channel 24 and protection channel 26 from switching matrix 22. Selector 37 checks a signal quality of both working channel 24 and protection channel

26 and accordingly selects on of working channel 24 and protection channel 26 for output.

5 All of the protection schemes discussed above provide for the occurrence of protection switching in the input and output interfaces of a cross-connect switch to avoid disruption of matrix connections in the switching matrix of the cross-connect switch. Thus, protection switching time requirements may be efficiently met without expending various resources necessary to perform a conventional protection switching operation. Though certain protection schemes are described, other protection schemes may implement this protection switching technique, including unidirectional path switched ring protection schemes.

10 Thus, it is apparent that there has been provided, in accordance with the present invention, a method and apparatus for providing network protection at input/output interfaces of a cross-connect switch that satisfy the advantages set forth above. Although the present invention has been described in detail, it should be understood that various changes, substitutions, and alterations may be readily ascertainable by those skilled in the art and may be made herein without departing from the spirit and scope of the present invention as defined by the following claims.

WHAT IS CLAIMED IS:

1. A method for providing network protection at input/output interfaces of a cross-connect switch, comprising:

5 receiving an inbound working channel and an inbound protection channel at an input interface;

determining a signal quality of the inbound working and protection channels;

10 selecting one of the inbound working and protection channels in response to the signal quality of the inbound working and protection channels;

providing the selected one of the inbound working and protection channels to a switching matrix.

15 2. The method of Claim 1, further comprising:

receiving a plurality of inbound working channels;

providing a protection switch request to an originator of the inbound working channels and inbound protection channel;

20 selecting two of the plurality of inbound working channels and the inbound protection channel;

providing traffic from the selected two of the plurality of inbound working traffic from the inbound working channels and the protection channel.

25 3. The method of Claim 2, wherein the network protection is a 1:n linear APS protection scheme.

4. The method of Claim 1, further comprising:
providing an outbound working channel and an outbound
protection channel;

switching the inbound working channel to the outbound
protection channel;

switching the inbound protection channel to the
outbound working channel, switching of the inbound working
and protection channels preventing information from being
provided to the switching matrix.

5. The method of Claim 4, wherein the network
protection is a bidirectional line switched ring protection
scheme implementing a ring switch.

6. The method of Claim 1, wherein the network
protection is a 1+1 linear APS protection scheme.

7. The method of Claim 1, wherein the network
protection is a bidirectional line switched ring protection
scheme implementing a span switch.

8. The method of Claim 1, wherein the network
protection is a FFP protection scheme.

9. The method of Claim 1, further comprising:
receiving a control signal, the control signal
determining the selection of one of the inbound working and
protection channels.

10. The method of Claim 1, further comprising:
maintaining connections in the switching matrix
regardless of the selection of one of the inbound working
and protection channels.

11. An apparatus for providing network protection at a cross-connect switch, comprising:

an input interface operable to receive an inbound working channel and an inbound protection channel, the
5 input interface operable to determine a signal quality of each of the inbound working and protection channels, the input interface operable to select one of the inbound working and protection channels according to the determined signal qualities;

10 a switching matrix operable to receive a selected one of the inbound working and protection channels, the switching matrix operable to output the selected one of the inbound working and protection channels over a pre-determined matrix connection, the switching matrix
15 maintaining matrix connections regardless of which one of the inbound working and protection channels is selected.

12. The apparatus of Claim 11, further comprising:

20 an output interface operable to receive the selected one of the inbound working and protection channels, the outbound interface operable to broadcast the selected one of the inbound working and protection channels onto an outbound working channel and an outbound protection channel.

25 13. The apparatus of Claim 11, wherein the input interface receives a plurality of inbound working channels, the input interface operable to select two of the inbound protection channel and plurality of inbound working
30 channels.

14. The apparatus of Claim 11, further comprising:

an output interface operable to receive the selected one of the inbound working and protection channels, the outbound interface operable to select one of an outbound working channel and an outbound protection channel over which the selected one of the inbound working and protection channels is to be carried.

15. The apparatus of Claim 11, wherein the input

interface is operable to provide an outbound working channel and an outbound protection channel, the input interface operable to connect the inbound working channel to the outbound protection channel, the input interface operable to connect the inbound protection channel to the outbound working channel, thereby bypassing the switching matrix.

METHOD AND APPARATUS FOR PROVIDING NETWORK PROTECTION AT
INPUT/OUTPUT INTERFACES OF A CROSS-CONNECT SWITCH

ABSTRACT OF THE DISCLOSURE

A telecommunications system (10) includes a first cross-connect switch (12) and a second cross-connect switch (14). The first cross-connect switch (12) includes a switching matrix that provides information from a matrix connection to a selector (28) of an output interface (18). The selector (28) places the information from the switching matrix onto one or both of a working channel (24) and a protection channel (26). The second cross-connect switch (14) receives the working channel (24) and the protection channel (26) at an input interface (20). The input interface (20) includes a selector (30) that checks a signal quality of the working channel (24) and the protection channel (26). When necessary, the selector (30) sends a request to the selector (28) to bridge the working channel (24) onto the protection channel (26). According to the signal quality, the selector (30) selects one of the working channel (24) and the protection channel (26) for transfer to a switching matrix (22) of the second cross-connect switch (14). The selector (30) avoids creating and deleting matrix connections in the switching matrix (22) in performing protection switches between the working channel (24) and the protection channel (26).

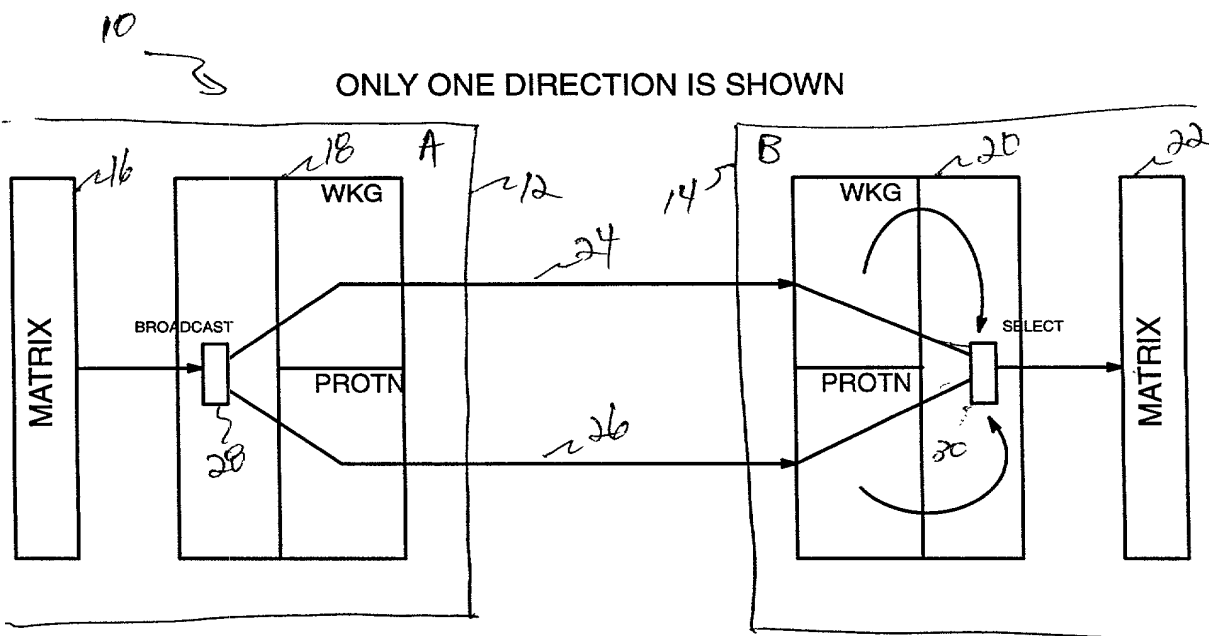


Figure I. 1+1 Linear APS

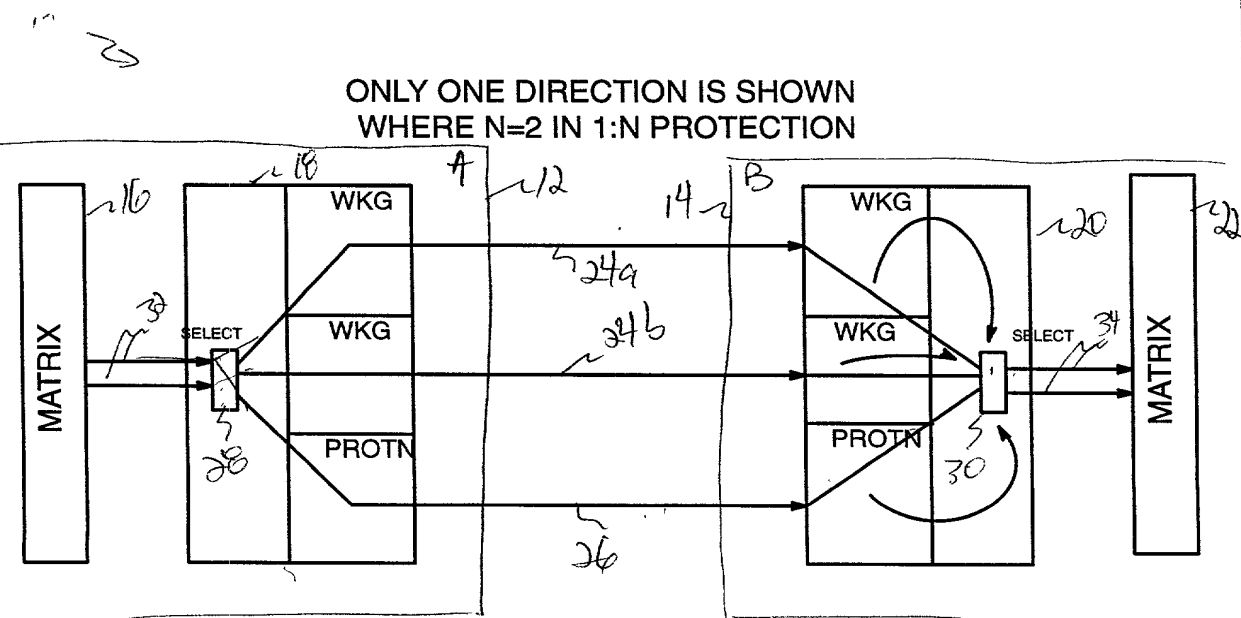


Figure II. 1:n Linear APS

66223-4E92460

ONLY ONE DIRECTION IS SHOWN

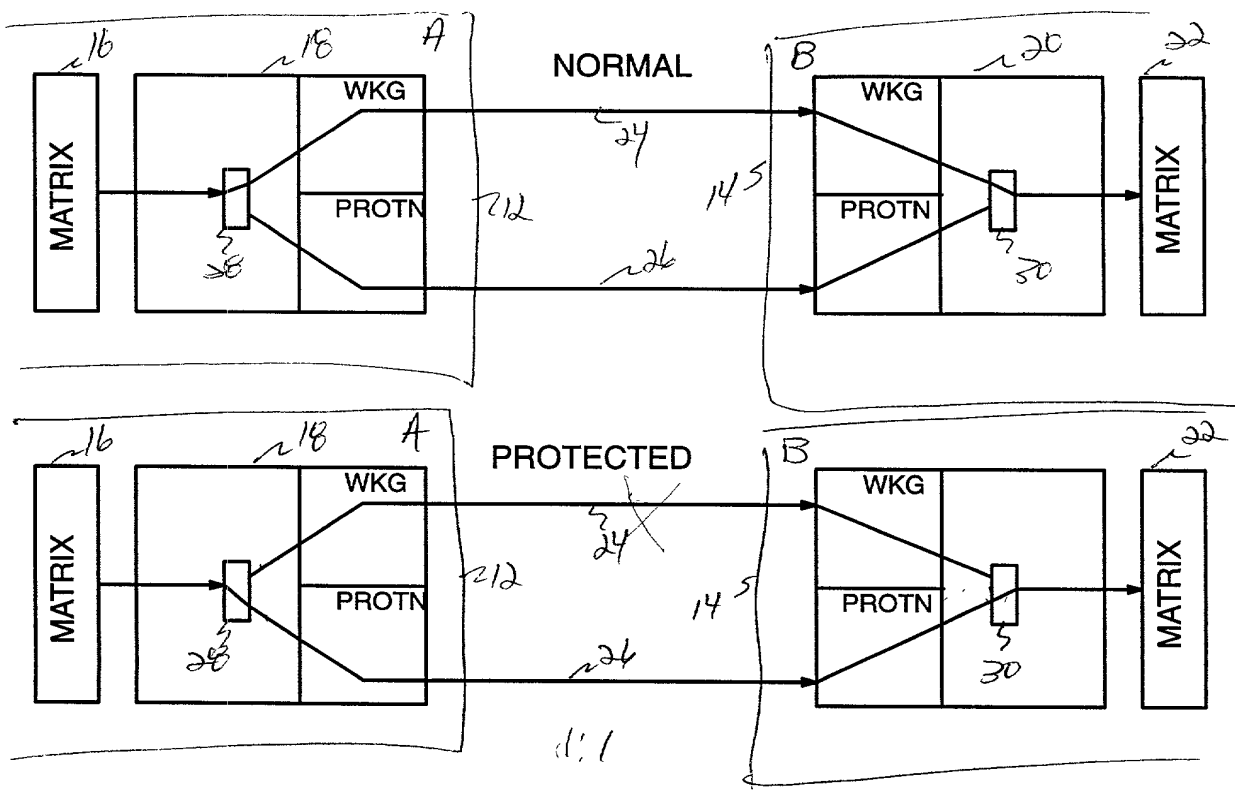


Figure III. BLSR Span Switch



ONLY ONE DIRECTION IS SHOWN

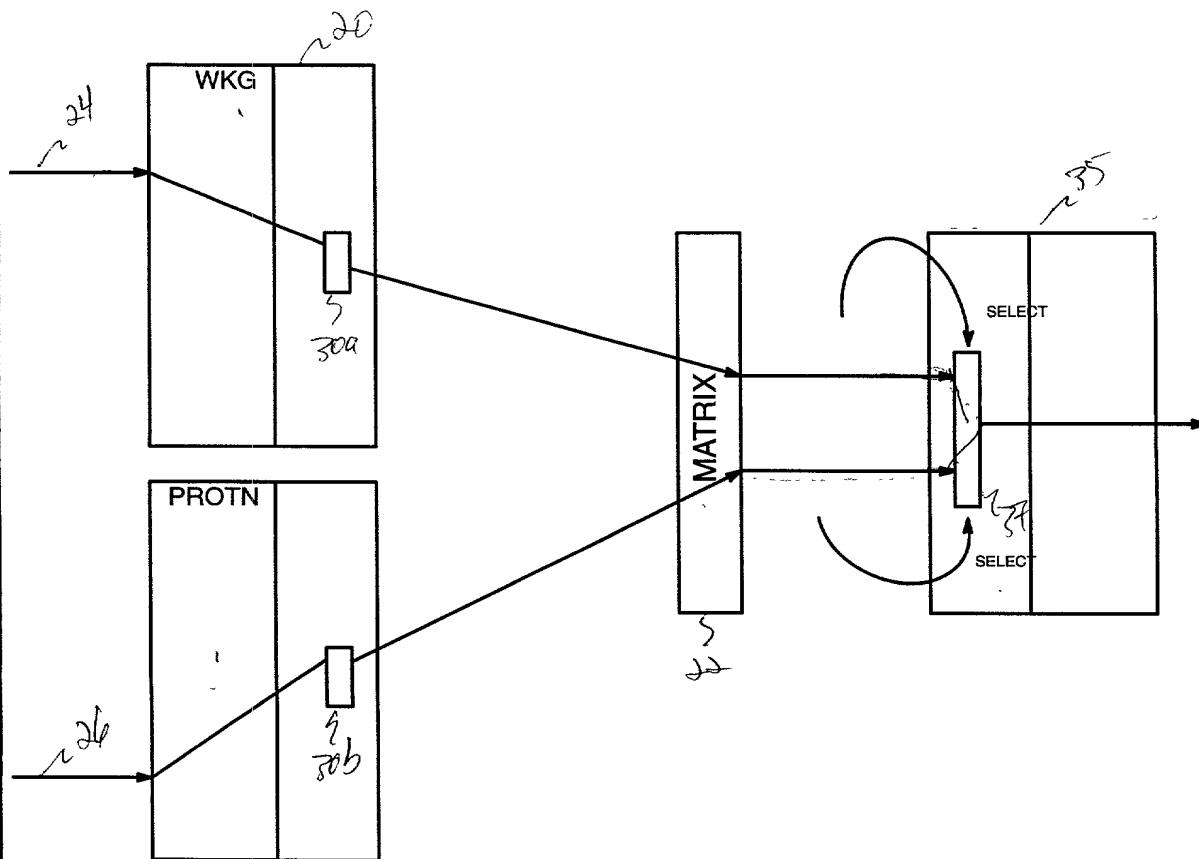


Figure V. FFP

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare:

that my residence, post office address, and citizenship are as stated below next to my name;

that I believe I am the original, first, and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention or design entitled METHOD AND APPARATUS FOR PROVIDING NETWORK PROTECTION AT INPUT/OUTPUT INTERFACES OF A CROSS-CONNECT SWITCH, the specification of which (check one):

 X is attached hereto; or

 was filed on as Application
Serial No. and was amended on
(if applicable);

that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and that I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

I hereby appoint:

Wayne A. Jones	Reg. No. 30,761
V. Lawrence Sewell	Reg. No. 22,753
Joseph E. Rogers	Reg. No. 33,031
Craig A. Hoersten	Reg. No. 38,917
Richard A. Mysliwiec	Reg. No. 40,098

of Alcatel USA, Inc., and the following:

Jerry W. Mills	Reg. No. 23,005
Ann C. Livingston	Reg. No. 32,479
Thomas R. Felger	Reg. No. 28,842
Charles S. Fish	Reg. No. 35,870
Wei Wei Jeang	Reg. No. 33,305
Kevin J. Meek	Reg. No. 33,738
T. Murray Smith	Reg. No. 30,222
David G. Wille	Reg. No. 38,363
Bradley P. Williams	Reg. No. 40,227
Terry J. Stalford	Reg. No. 39,522
Harold E. Meier	Reg. No. 22,428
Thomas R. Nesbitt, Jr.	Reg. No. 22,075
James J. Maune	Reg. No. 26,946
Roger J. Fulghum	Reg. No. 39,678
Rodger L. Tate	Reg. No. 27,399
James B. Arpin	Reg. No. 33,470
James Remenick	Reg. No. 36,902
Robert W. Holland	Reg. No. 40,020
Douglas M. Kubehl	Reg. No. 41,915
Randall M. Mishler	Reg. No. 42,006
Robert A. King	Reg. No. 42,738
James L. Baudino	Reg. No. 43,486
Scott T. Morris	Reg. No. 43,818
Tara D. Knapp	Reg. No. 43,723
William R. Borchers	Reg. No. 44,549
Robin A. Brooks	Reg. No. 44,563
Darren W. Collins	Reg. No. 44,625
Brian W. Oaks	Reg. No. 44,981
Luke K. Pedersen	Reg. No. 45,003
Matthew B. Talpis	Reg. No. 45,152
David M. Doyle	Reg. No. 43,596

all of the firm of Baker & Botts, L.L.P., my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent applications filed thereon before any international authorities.

ATTORNEY DOCKET NO.
036560.6630
(1031-00)

PATENT APPLICATION

3

Send Correspondence To:

Alcatel USA, Inc.
1000 Coit Road, M/S LEGL 3
Plano, Texas 75075

Direct Telephone Calls To:

V. Lawrence Sewell
at (972) 519-3735
Atty. Docket No. 1031-00

Full name of the first inventor

Anthony (nmi) Mazzurco

Inventor's signature

Date

Residence (City, County, State)

Plano, Collin County, Texas

Citizenship

United States of America

Post Office Address

4121 New Forest Drive
Plano, Texas 75093

ATTORNEY DOCKET NO.
036560.6630
(1031-00)

PATENT APPLICATION

4

Full name of additional joint inventor, if any

Joseph A. Crossett, III

Inventor's signature

Date

Residence (City, County, State)

Richardson, Dallas County,
Texas

Citizenship

United States of America

Post Office Address

1104 Eton Drive
Richardson, Texas 75080

036560.6630

Full name of additional joint inventor, if any

Manouchehr (nmi) Darabpour

Inventor's signature

Date

Residence (City, County, State)

Carrollton, Denton County,
Texas

Citizenship

United States of America

Post Office Address

4209 Spurwood Drive
Carrollton, Texas 75010